

5, 7.5, 10 and 15 Horsepower

Sullivan Palatek®

Rotary Screw Compressors

- ◆ **Compact Design**
- ◆ **Continuous Duty Rated**
- ◆ **Advanced design
Increased Performance**
- ◆ **2 year warranty Air end**



Unit comes complete with starter, aftercooler, high temperature protection.

Space consuming receiver tank not required.


Proven performance with Exceptional Design

Standard Features

5, 7.5, 10, and 15 Horsepower Compressors

- Compressor:** Oil flooded rotary screw, continuous duty, industrial air compressor Two Year air end warranty.
- Electric Motor:** 208, 230, or 460 volt 3 phase NEMA T-frame, C-face, One drip proof Squirrel cage induction type, 230 1 phase available for 5 and 7.5 Hp
- Motor Starter:** 208, 230, or 460 volt full voltage starter with 120 volt controls, NEMA 1 enclosure, fused control transformer and overloads.
- Air Intake Filter:** Over sized dry type with replacement element.
- Separator Tanks:** ASME coded tank with relief valve, minimum pressure/check valve, high efficiency replaceable oil separator element, fluid level sight indicator, and vented fill cap.
- Controls:** Full modulation, solenoid controlled for smooth pressure response and lowest no load power. Optional constant speed timed dual control available.
- Instrumentation:** Sump pressure gauge, hour meter, and discharge temperature gauge.
- Protective Devices:** All phase overload protection for motor, high temperature, and over pressure shutdown switches.
- Mounting:** Base mounted - No special foundation required
- Options:** Enclosure, timed start-stop control, moisture separator, line pressure gauge and tank mounting. Consult Harris Equipment for accessories not listed. Specifications subject to change without notice.

Lube Reservoir Capacity	1 Gal.
Length	30"
Height	26"
Width	26 1/4"
Weight 5 HP	230#
Weight 7.5 HP	300#
Weight 10 HP	350#
Weight 15 HP	400#
Discharge Connection	3/4" NPT

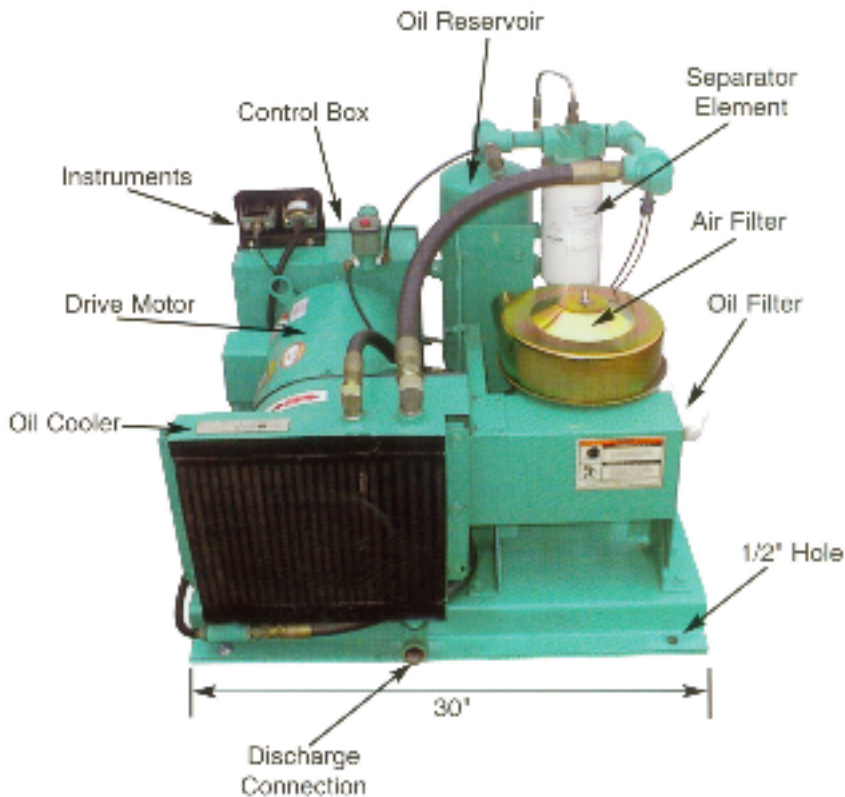

**Sold and serviced by
Harris Equipment Corporation
2010 North Ruby Street
Melrose Park, IL 60160
Phone 708-343-0866
FAX 708-343-0995**